

Engine Cummins X15
Rated Power 391 kW (524 hp / 532 ps) @ 1,800 rpm
Net Power 375 kW (503 hp / 510 ps) @ 1,800 rpm
Standard Bucket Capacity 5.0 m³
Maximum Digging Depth 7,625 mm
Operating Weight 75,300 kg

975F EXCAVATOR


975F SPECIFICATIONS >>>


PERFORMANCE	
Operating Weight	75,300 kg
Std. Bucket Heaped Capacity (Referenced)	5.0 m ³
Maximum Travel Speed	4.7 km/h
Swing Speed	7.13 rpm
Drawbar Pull	495 kN
Bucket Digging Force (ISO)	397 kN
Arm Digging Force (ISO)	349 kN

ENGINE	
Emission Regulation	Tier 4F / Stage V
Manufacturer	Cummins
Model	X15
Rated Power	391 kW (524 hp / 532 ps) @ 1,800 rpm
Net Power	375 kW (503 hp / 510 ps) @ 1,800 rpm
Peak Torque	2,373 N·m @ 1,400 rpm
Number of Cylinders	6
Displacement	15 L

UNDERCARRIAGE	
Shoe Width	650 mm
Number of Shoes per Side	48
Number of Upper Rollers per Side	3
Number of Bottom Rollers per Side	8

DI	MENSIONS	
Α	Shipping Length	13,090 mm
В	Shipping Height	4,260 mm
С	Track Gauge	3,350 mm
D	Undercarriage Width	4,240 / 4,000 mm
Ε	Length to Center of Rollers	4,750 mm
F	Track Length	5,990 mm
G	Overall Width of Upper Structure	4,260 / 3,390 mm
Н	Tail Swing Radius	4,490 mm
1	Counterweight Ground Clearance	1,495 mm
J	Overall Height of Cab	3,490 mm
K	Min. Ground Clearance	867 mm

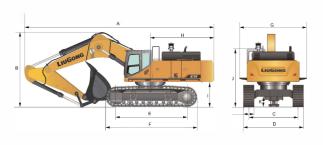

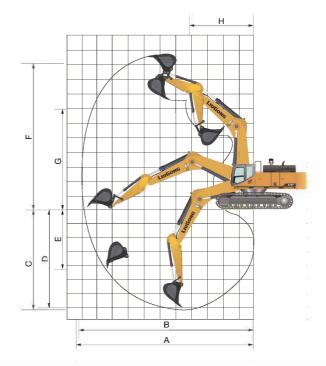

WORKING RANGE	
Boom Length	7,060 mm (6,600mm Optional)
Arm Length	2,900 mm
A Max. Digging Reach	11,800 mm
B Max. Digging Reach on Ground	d 11,500 mm
C Max. Digging Depth	7,625 mm
D Max. Digging Depth, 2.44 m (8	') Level 7,450 mm
E Max. Vertical Wall Digging Dep	th 4,200 mm
F Max. Cutting Height	11,240 mm
G Max. Dumping Height	7,315 mm
H Min. Front Swing Radius	4,490 mm

HYDRAULIC SYSTEM	
Main Pumps Total Flow	2×504 L/min
Relief Pressure, main	35 MPa
Relief Pressure, boost	37.3 MPa

SERVICE CAPACITIES	
Fuel Tank	1,100 L
Engine Oil	46 L
Cooling System	72 L
Hydraulic Reservoir	320 L
Hydraulic System Total	680 L